




JT-R2420A





2.4GHZ Ceiling Indoor RFID Reader

JT-R2420A is a self-developed high-performance 2.4G active tag fixed reader. Have a complete independent intellectual property rights, the default operating frequency band of the reader is 2.45GHz, which has strong multi-tag recognition ability, The card reading distance is longer than other frequency band, the protection grade up to IP65, the installation and configuration are convenient.

SPECIFICATIONS

RFID PARAMETERS	
Frequency	2.4GHz~2.45GHz
Protocol	ISO18000-4-2015
Identify direction	Omnidirectional
Anti-collision capability	>200 tags
Antenna gain	3dbi,dual polarization
Receive sensitivity	-90dBm
Recognition speed	200km/h
Working mode	Send and receive together
Signal modulation mode	GFSK
Communication rate	1Mbit/s
Communication Interface	RS232,RJ45;WiFi(optional)
IP grade	IP54
Power supply	7V~24V/3A;PoE(optional)
Working current	0.15A@12V,25° C
SDK	Demo&C++,C#,JAVA,Android SDK
USE ENVIRONMENT	
Operating Temp.	-20° C~+60° C
Storage Temp.	-40° C~+80° C
Humidity	5-90% non-condensing (+25° C)
PHYSICAL PARAMETERS	
Shell material	ABS
Dimensions	205(D)*45(T)mm
Net weight	292g
Pack size	42*26*10cm
Pack weight	1kg

DIMENSIONS

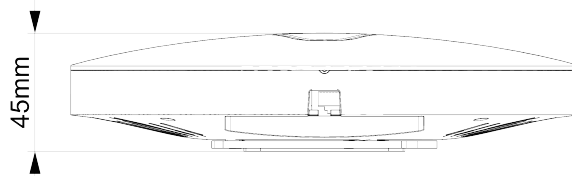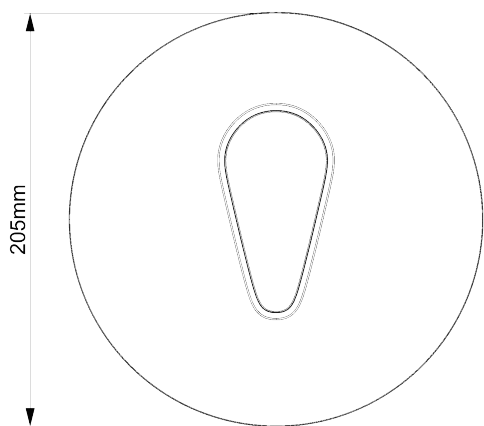

APPLICATION



Asset Management



Warehouse Management

Shenzhen Jietong Technology Co.,Ltd

Address : 12/F,Building A, No. 6,Shiben Road,Shiyan Street,Bao'an District,Shenzhen,Guangdong,China-518108

Email : marketing@jtspeedwork.com

Website : www.jtspeedwork.com